



The **P360S** is a compact 90W LED with tunable CCT, magenta/green adjustment, and flicker-free dimming down to 0%. This water-resistant fixture is extremely portable, weighing less than 2lbs, and is available in travel-friendly three-light kits.



For users looking to get the most out of the P360S, Fiilex offers a wide array of accessories, including fresnel and diffuser attachments as well as softboxes. D-Tap cables allow the lights to be connected to battery power (12-30V).



FEATURES

- 2800-6500K tunable CCT
- 300W tungsten output (90W draw)
- High CRI values at every color temperature
- ± 0.25 magenta/green adjustment
- Dims to 0% without flicker or color shift
- Precise color calibration for consistent quality
- OLED display for monitoring settings
- DMX controllable (3-channels: intensity, CCT, hue)
- Water resistant (IP-X4)
- Weighs less than 2 lbs
- Supports 12-30V battery input with D-Tap accessory
- Available in portable three-light kits


BEAM PROFILE

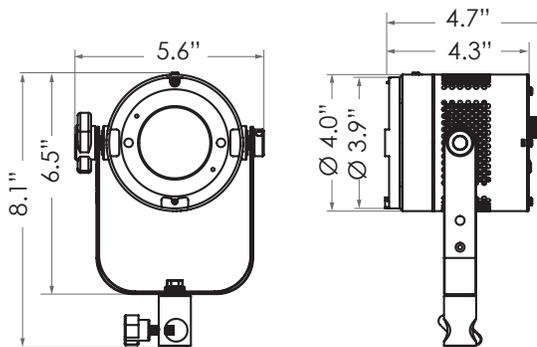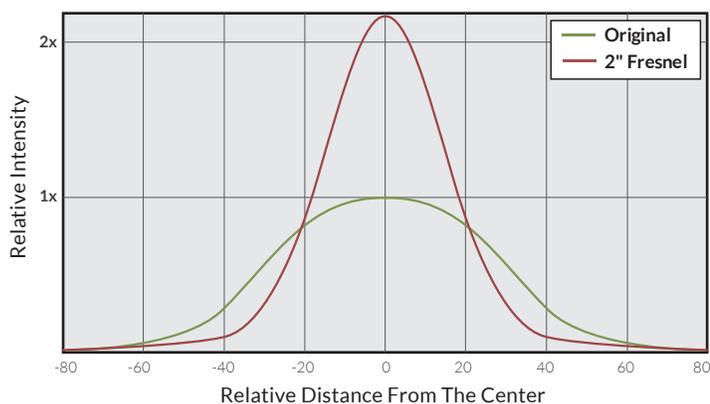

SPECIFICATIONS

Beam Angle	65° (33° with 2" fresnel, 20° with 3" fresnel)
CCT Range	2800 - 6500K
CRI	95 typical
TLCI	90 typical
Hue	±0.25 green/magenta
Dimming	100% - 0% flicker free
Light Engine	Dense Matrix LED
Power Draw	90W max
DC Input	12 - 30V DC (80W DC max)
AC Input	100 - 240V AC, 50 ~ 60Hz
DMX Control	3-CH (intensity, CCT, hue) via TRRS Ports
Display Type	OLED
Weight	1.85lbs / 0.84kg
Size (L x W x H)	4.7" x 5.6" x 8.1" / 11.9cm x 14.2cm x 20.6cm
Mount	Baby stud 5/8" female (16mm)
IP Rating	IP-X4 (water resistant)
Thermal Design	Advanced vapor cooling system (fan cooled)
Operating Temperature	32 - 104°F / 0 - 40°C

PHOTOMETRIC DATA

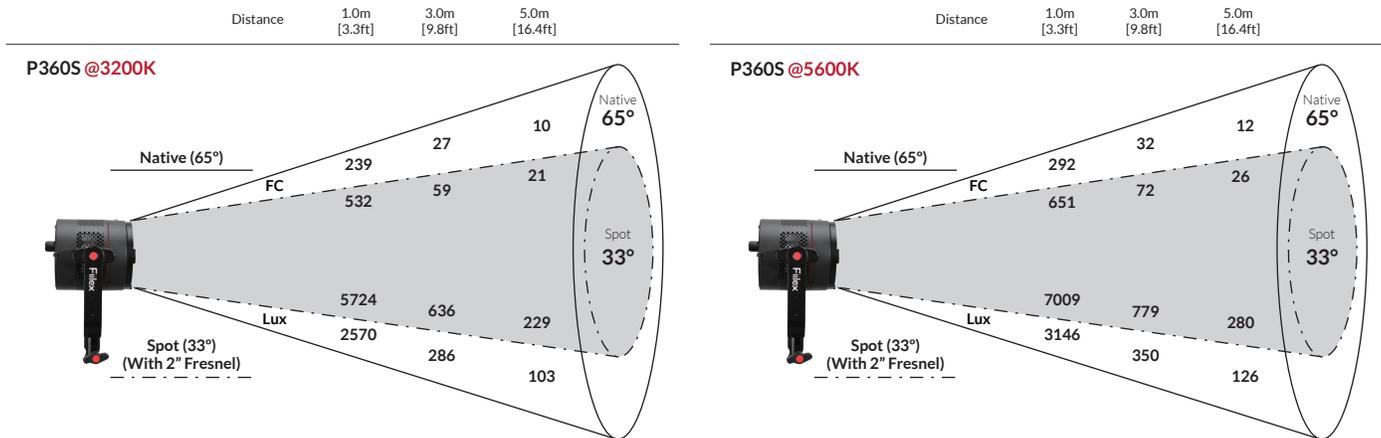

OPTIONAL ACCESSORIES & KITS



Dome Diffuser (1-Stop)



20° Fresnel



D-Tap Cable - 24" Curled



D-Tap Cable - 96" Straight



K301S Kit
3 x P360S
FLXK301S

